

"SUCTION/TRANSFER HOSE"

...perfect for in-plant environments!

PHC is a clear hose, reinforced with clear helix rod and is compliant with 3A1, USDA2 & FDA⁴ standards. Suited for in-plant environments, its low temperature flexibility is perfect for all liquid or dry product transfers.

Features:

- Light Weight
- · Clear Viewing of Product Flow
- Highly Flexible
- Phthalate FREE
- Higher Working Pressures

Applications:

- Food Grade Liquids
- Beer, Wine & Juice
- Potable Water
- Poultry Processing
- Milk & Dairy Transfer
- Ice Transfer
- Dry Transfer

WARNING: Working pressure ratings for all Flex-Rite™ Products are based on 70° F (ambient temperature). Working pressure and vacuum ratings will decrease as temperatures increase. For "P" series applications that exceed 100°F contact manufacturer for suggestions.




P-Series hoses are Phthalate (DEHP) FREE

MODEL	I.D.	0.D.	WORKING PRESSURE	MIN. BEND Radius	WEIGHT PER FT.	VAC. IN HG.	LENGTH
PHC100	1"	1.28"	100 PSI	3.0"	.24 lbs.	29"	100'
PHC150	11/2"	1.80"	85 PSI	6.0"	.50 lbs.	29"	100'
PHC200	2"	2.36"	85 PSI	8.0"	.71 lbs.	29"	100'
PHC250**	21/2"	2.88"	65 PSI	10.0"	.94 lbs.	29"	100'
PHC300**	3"	3.42"	55 PSI	11.0"	1.14 lbs.	29"	100'
TUBE FDA, 3-A*, UHMW-PVC						ER Clear	

REINFORCEMENT Clear helix

TEMP. RANGE -4 to 150° F

PHC Suction/Transfer Hose

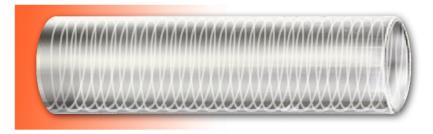

¹3A-The PVC compound complies with the criteria in 3-A Sanitary Standards for Multiple-Use Plastic Materials, number 20.

²USDA - The PVC hose has been found chemically acceptable for use in slaughtering, processing, transporting, or storage areas in direct contact with meat or poultry food product prepared under Federal Inspection.

⁴FDA - The PVC ingredients used are sanctioned for food contact use under CFR title 21, parts 170-199 or FD&C Act, section 409(h), notifications relating to food contact substance.

**Bulk Only (Fittings not available)

Note: PHH & PHC available with reusable fittings only