



# ISH

## Steam

### I-Series Industrial Hose

ISH is a rugged, abrasive and blister resistant hose for cleaning pumps, valves, tubing and equipment suitable for steam. Stands up to the harshest of environments with a specially formulated tube and cover that will not harden or crack during normal service. The steel braid reinforcement provides for safe use with steam pressures up to 250 PSI at 430° F.

*Represented is water when subjected to heat and pressure.*

*Use only hoses specifically designed for each application.*


MODEL	I.D.	O.D.	WORKING PRESSURE	WEIGHT PER FT.
ISH075	3/4"	1.25"	250 PSI	.48 lbs

**TUBE** Black Chlorobutyl  
**REINFORCEMENT** Steel braid

**COVER** Red EPDM  
**TEMP. RANGE** -40 to 430° F

*- Requires a Special Fitting consult factory -*

### Steam Hose Chart

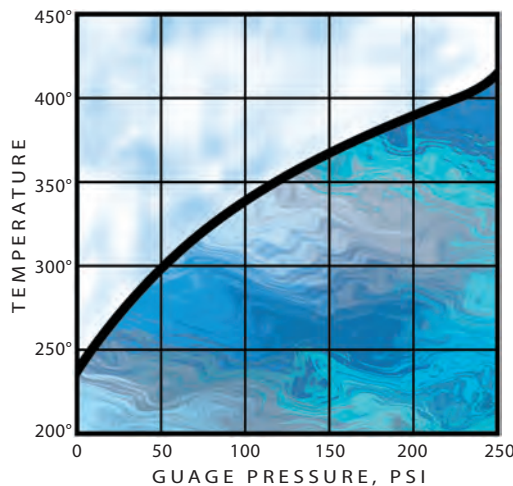

SATURATED STEAM	
Gauge Pressure (PSI)	Temp. of Saturated Steam (F°)
10	239
25	257
50	298
75	320
100	338
125	353
150	366
175	377
200	385
225	400
250	413

