




PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket

FEATURES

- Tef-Flex Sanitary Gaskets will Maintain I.D. without Re-Torquing or Leaking
- Steam Resistance – Very Low Swell and Minimal Loss of Physical Properties After Repeated Steam Cycling
- Chemical Resistance – Very Low Swell and Minimal Loss of Physical Properties After Long-Term Exposure to CIP Media
- Clean and Easy Removal of Gaskets – No Sticking to the Flanges
- Low Extractable Values
- Excellent Dimensional Stability
- Compliant with FDA Regulations CFR21 177 2600
- Animal Derived Ingredient Free (ADI)
- USP Class VI Compliant
- Temperature Range: -20°F to 300°F

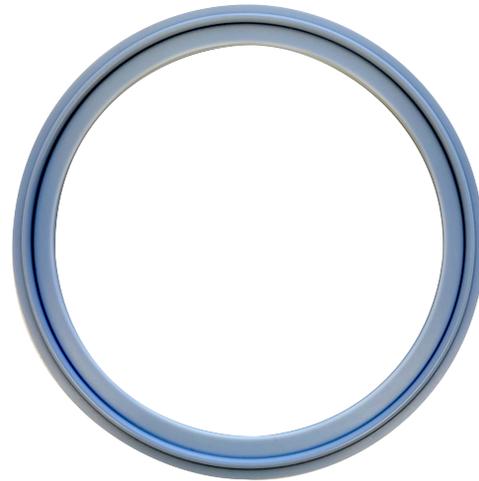

Part Number	Description
A42MPGR-TFE-1/2	.50in PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket
A42MPGR-TFE-3/4	.75in PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket
A40MPGR-TFE-1	1in PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket
A40MPGR-TFE-1.5	1.5in PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket
A40MPGR-TFE-2	2in PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket
A40MPGR-TFE-2.5	2.5in PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket
A40MPGR-TFE-3	3in PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket
A40MPGR-TFE-4	4in PTFE/EPDM Tef-Flex Unitized Tri-Clamp Gasket

Coupling Expertise with Speed & Simplicity™