




**FlexRite™**

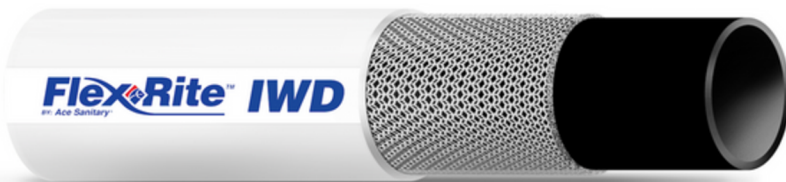

**Washdown**

**IWD**

**For less critical applications where FDA requirements aren't a consideration**

**IWD**, an economical, high-quality alternative to the RWD, delivers hot water up to **200°F**. The extruded construction provides excellent handling and flexibility. The abrasion-resistant, non-marking cover maintains its sanitary appearance.

### **Applications:**

Clean up of:

- Dairies
- Creameries
- Brewery
- Food & Beverage
- Meat & Poultry

MODEL	I.D.	O.D.	WORKING PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	VAC. IN HG.	LENGTH
IWD050	1/2"	0.84"	300 PSI	-	.26 lbs	-	500'
IWD075	3/4"	1.17"	300 PSI	-	.40 lbs	-	500'

**TUBE** Black EPDM

**REINFORCEMENT** Two synthetic textile spiral cords.

**COVER** White EPDM

**TEMP. RANGE** -40 to 275° F

### **Other Sizes and Colors Available**

ALL R-Series hose products meet/comply: USDA Class III requirements, FDA CFR Title 21.1772600, 3-A 18-03  
\*The 3-A 62-02, standard applies only to assemblies of 3/4" diameter and larger.

**WARNING** Working pressure ratings for all Flex-Rite™ brand hoses are based on 70° F (ambient temperature). Working pressure and vacuum ratings will decrease as temperatures increase. For "R" series applications that exceed 200° F contact manufacturer for suggestions.

**Coupling Expertise with Speed & Simplicity™**