

## Discharge RDC


### Features:

- Light Weight
- Higher Pressures
- Non Wire/Non Metallic

MODEL	I.D.	O.D.	WORKING PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	VAC. IN HG.	LENGTH
RDC150	1-1/2"	2.07"	250 PSI	-	.98 lbs	-	100'
RDC200	2"	2.59"	250 PSI	-	1.38 lbs.	-	100'
RDC250	2-1/2"	3.11"	250 PSI	-	1.78 lbs.	-	100'

**TUBE** White, FDA, 3-A\*, Chlorobutyl  
**REINFORCEMENT** Spiral-plied synthetic fabric  
**RECOMMENDED CLEANING** CIP, COP

**COVER** Blue EPDM w/white stripe  
**TEMP. RANGE** -40 to 225° F

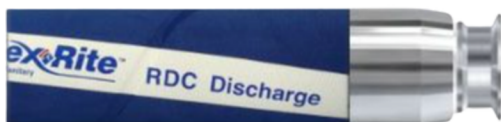

### Applications:

- Pump Discharge
- CIP Supply to Spray Nozzles
- Spray Ball
- Vertical Applications
- Overhead Applications
- Drain Lines
- Metal Detection Systems

**RDC**, a **lightweight** discharge hose provides extra flexibility and smooth handling. (Meets 3-A\* standards, USDA requirements and is FDA compliant). Designed to be chemically resistant to mild caustic solutions. This discharge hose is well suited for **overhead CIP** wash units and capable of handling pressures up to 250 PSI.

ALL R-Series hose products meet/comply: USDA Class III requirements, FDA CFR Title 21.1772600, 3-A 18-03  
\*The 3-A 62-02, standard applies only to assemblies of 3/4" diameter and larger.

**WARNING** Working pressure ratings for all Flex-Rite™ brand hoses are based on 70° F (ambient temperature). Working pressure and vacuum ratings will decrease as temperatures increase. For "R" series applications that exceed 200° F contact manufacturer for suggestions.

## Coupling Expertise with Speed & Simplicity™