





TSB-L
"SMOOTH BORE"
TSB-LC
PTFE

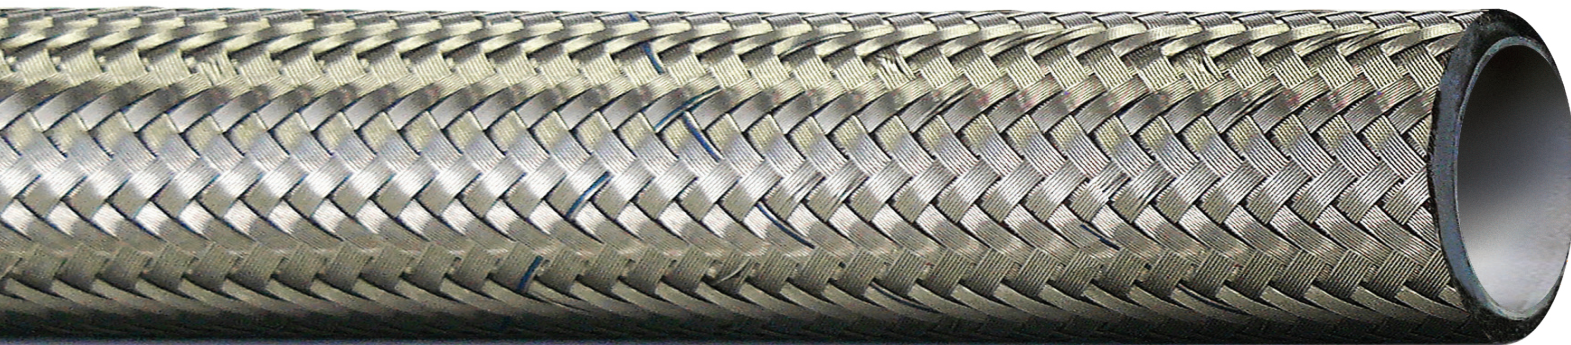

EXCELLENT FOR FIXED APPLICATIONS!

TSB-L "Smooth Bore"

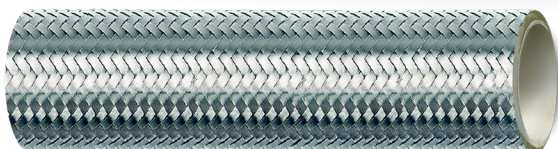


TSB-L is excellent for fixed applications where minimal abuse, handling or flexing exist. Available for "Flared through" applications.

Hose cover options available.

Features: Higher Working Temps / Full Vacuum Capabilities / Autoclaveable Smooth Bore / Chemical Resistant

Applications: Product Transfer / Load Cells / Gas Transfer / Compressed Air Concentrated CIP Chemicals / Food, Flavor, and Fragrances / Drain and Sample / Corrosive Environments / Vibration Isolation

TSB-LC PTFE

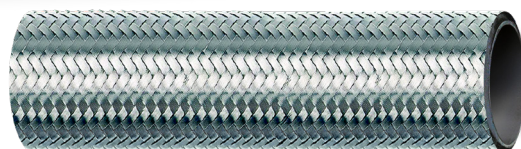

Optional Conductive Tube Available (special order consult factory)

TSB-LC addresses **Static Electric** concerns. A PTFE conductive liner with a carbon rich inner contact surface capable of conducting 1,000 microamps of current (1 milliamp) when 1000 volts (DC) or less is applied to the surface. The carbon is a **high purity furnace black** and meets **FDA 21CFR 178.3297**.

All "T-Series" hose meet **USP Class VI & FDA Criteria**.
Hose cover and Anti-static tube options available.

MODEL	I.D.	O.D.	WORKING PRESSURE	BURST PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	LENGTH
TSB-L012	0.125"	0.240"	3,260 PSI	13,040 PSI	1.6"	0.047 lbs.	50'
TSB-L018	0.1875"	0.300"	3,000 PSI	12,000 PSI	2.0"	0.077 lbs.	50'
TSB-L025	0.250"	0.375"	3,000 PSI	12,000 PSI	3.0"	0.098 lbs.	50'
TSB-L031	0.3125"	0.430"	2,540 PSI	10,160 PSI	4.0"	0.110 lbs.	50'
TSB-L037	0.375"	0.480"	2,500 PSI	10,000 PSI	5.0"	0.124 lbs.	50'
TSB-L040	0.405"	0.540"	2,250 PSI	9,000 PSI	5.4"	0.134 lbs.	50'
TSB-L050	0.500"	0.640"	2,000 PSI	8,000 PSI	6.6"	0.154 lbs.	50'
TSB-L062	0.625"	0.740"	1,500 PSI	6,000 PSI	8.0"	0.170 lbs.	50'
TSB-L075	0.750"	0.910"	1,100 PSI	4,400 PSI	9.2"	0.198 lbs.	50'
TSB-L087	0.875"	1.03"	1000 PSI	4,000 PSI	9.2"	0.273 lbs.	50'

TUBE: PTFE unpigmented, USP Class VI & FDA Criteria
COVER: Stainless Steel braid

TEMP. RANGE: -20 to 425° F
RECOMMENDED CLEANING: CIP, SIP, Autoclave

MODEL	I.D.	O.D.	WORKING PRESSURE	BURST PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	LENGTH
TSB-LC012	0.125"	0.240"	3,260 PSI	13,040 PSI	1.6"	0.047 lbs.	50'
TSB-LC018	0.1875"	0.300"	3,000 PSI	12,000 PSI	2.0"	0.077 lbs.	50'
TSB-LC025	0.250"	0.375"	3,000 PSI	12,000 PSI	3.0"	0.098 lbs.	50'
TSB-LC031	0.3125"	0.430"	2,540 PSI	10,160 PSI	4.0"	0.110 lbs.	50'
TSB-LC037	0.375"	0.480"	2,500 PSI	10,000 PSI	5.0"	0.124 lbs.	50'
TSB-LC040	0.405"	0.540"	2,250 PSI	9,000 PSI	5.4"	0.134 lbs.	50'
TSB-LC050	0.500"	0.640"	2,000 PSI	8,000 PSI	6.6"	0.154 lbs.	50'
TSB-LC062	0.625"	0.740"	1,500 PSI	6,000 PSI	8.0"	0.170 lbs.	50'
TSB-LC075	0.750"	0.910"	1,100 PSI	4,400 PSI	9.2"	0.198 lbs.	50'
TSB-LC087	0.875"	1.03"	1000 PSI	4,000 PSI	9.2"	0.273 lbs.	50'

TUBE: PTFE unpigmented, FDA Criteria
COVER: Stainless Steel braid

TEMP. RANGE: -20 to 425° F
RECOMMENDED CLEANING: CIP, SIP, Autoclave

WARNING: Working pressure ratings for all Flex-Rite™ brand hoses are based on 70° F (ambient temperature). Working pressure and vacuum ratings will decrease as temperatures increase. For "T" series applications that exceed 250° F contact manufacturer for suggestions.



5219 Muhlhauser Rd., Cincinnati, OH 45011

513-889-2118 • 855-357-4110 • fax/513-889-2125 • sales@acesanitary.com • www.acesanitary.com